


NOTES:

- PAVER AND/OR LANDSCAPED MEDIANS SHALL COMPLY WITH PARKS & RECREATION DIVISION (P&R) STANDARD DETAILS AND BE INSTALLED WHERE DIRECTED BY P&R.
- MEDIANS SHALL HAVE A MINIMUM 1% SLOPE TOWARD THE CURB OR DRAIN.
- CURB SHALL BE TYPE "B" VERTICAL CURB WHEN ROAD SLOPES AWAY FROM MEDIAN AND TYPE "A" CURB AND GUTTER WHEN ROAD SLOPES TOWARD MEDIAN.
- ALL UTILITY OR SERVICE BOXES SHALL BE RESET TO GRADE AS REQUIRED.

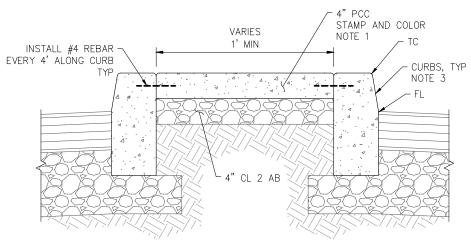

CONCRETE MEDIAN

- NOTES:

 1. STAMP PATTERN AND COLORING SHALL BE APPROVED BY PARKS & RECREATION PRIOR TO INSTALL. A SAMPLE MAY BE REQUIRED TO BE SUBMITTED FOR REVIEW.

 2. STAMP PATTERN AND COLORING SHALL BE APPROVED BY PARKS & RECREATION PRIOR TO INSTALL. A SAMPLE MAY BE REQUIRED TO BE SUBMITTED FOR REVIEW.

 - CURB SHALL BE TYPE "B" VERTICAL CURB WHEN ROAD SLOPES AWAY FROM MEDIAN AND TYPE "A" CURB AND GUTTER WHEN ROAD SLOPES TOWARD MEDIAN. 3.
 - ALL UTILITY OR SERVICE BOXES SHALL BE RESET TO GRADE AS REQUIRED.

SOUTH SAN **FRANCISCO PUBLIC WORKS** ENGINEERING

STANDARD MEDIAN

DEC 2022

R-8A