


**STANDARD CROSSWALK
BASIC**

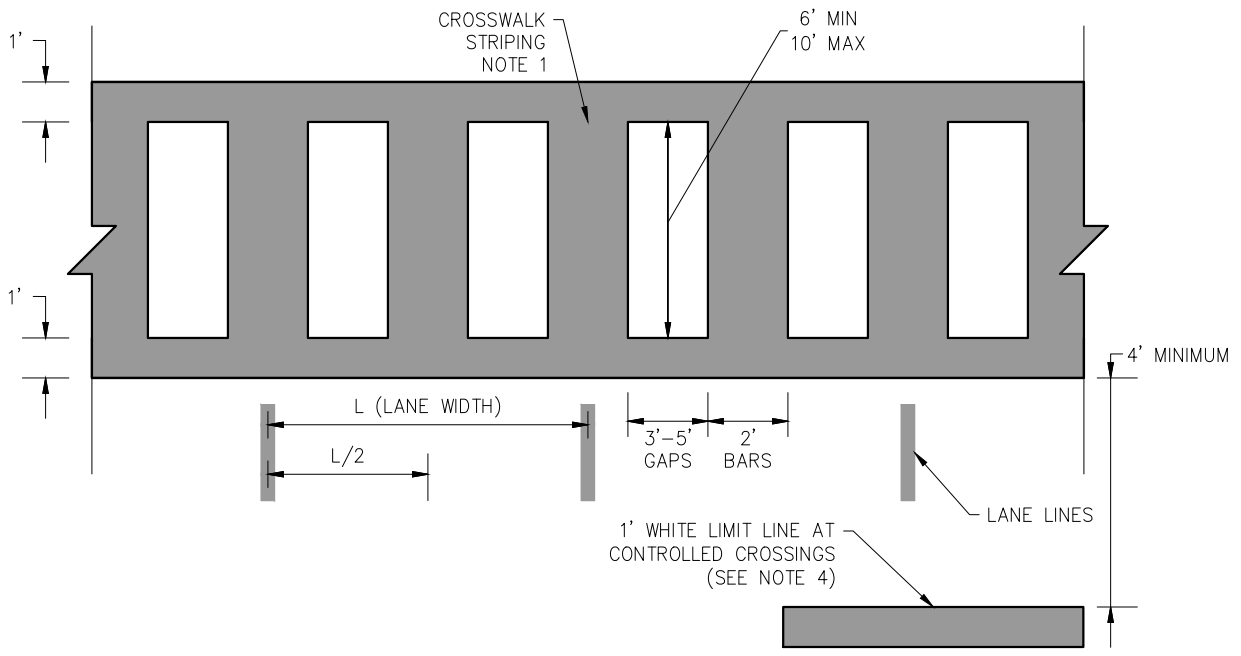

**HIGH-VISIBILITY CROSSWALK
LADDER**

CROSSWALK NOTES:

1. CROSSWALK STRIPING SHALL BE WHITE THERMOPLASTIC PAINT WITH GLASS BEADING (AASHTO M247 TYPE 2). WHERE CROSSWALK IS ADJACENT TO A K-12 SCHOOL OR ON A DESIGNATED SCHOOL ROUTE, CROSSWALK SHALL BE YELLOW. ALL CROSSWALKS IN THE SAME INTERSECTION SHALL BE YELLOW WHENEVER ONE CROSSWALK IS DESIGNATED AS YELLOW.
2. HIGH-VISIBILITY CROSSWALKS SHALL BE USED IN DESIGNATED MID-BLOCK CROSSINGS, HIGH-PEDESTRIAN AREAS, CORRIDORS, OR AS DIRECTED BY THE CITY ENGINEER. HIGH-VISIBILITY CROSSWALKS SHALL ONLY BE LADDER PATTERNED.
3. LADDER CROSSWALKS SHALL BE INSTALLED PARALLEL TO THE CURB. STAGGERED CROSSWALKS SHALL BE INSTALLED TO PLACE VEHICLE WHEEL PATHS BETWEEN THE PAINTED BARS.
4. PROVIDE 1' WHITE LIMIT LINE AT CONTROLLED YELLOW LADDER CROSSWALK LOCATIONS. PLACE 4' MINIMUM IN ADVANCE OF CROSSWALK.